

Рекомендовано
вольфрамовых
электродов

Инейtrix®

WAG 40.1



15° 180°

/

15-

3

/

/





7,5B 90B

15B 180B.


)

180



(F)

(W)

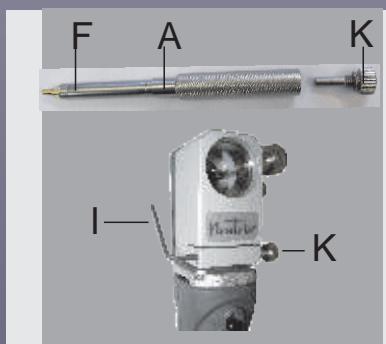

(F)

(A)

(I).




(GE =

)

0,3

,

(>d=1,6),

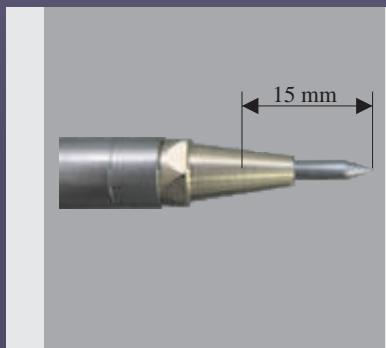

15

15

,

1

10

)



Neutrix

Neutrix



Neutrix WAG 40.1 -
WIG-,


, (1,0 4,00 , 175-15),
, 3-

: WAG 40.1

: 44170

:

: 850 d=1,6
: 230 / 50 - 60 : 11.500 -1 22.000 -1 d=2,4
: 88,8 (A) : 5 / d=3,2
: 1,0 4,0 : 8 4
: 40 : 2,8 13/17
a: 13/14

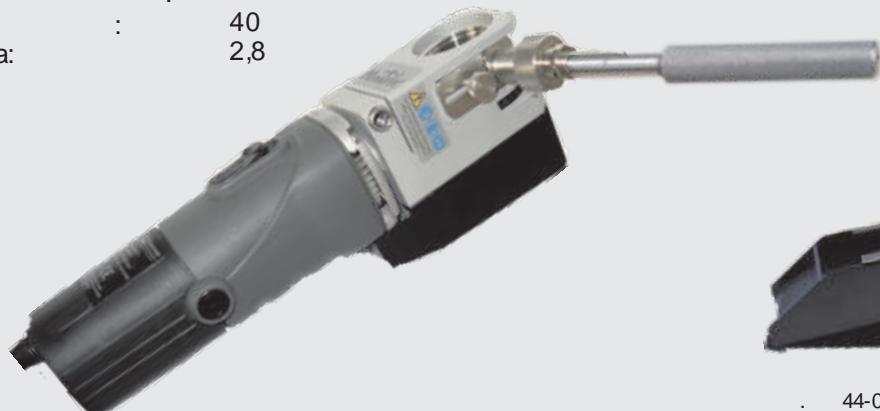

-S 44-07-45510250

-SW 44-07-4551025

Neutrix®



54170

54171

59000

WAG40.1 S

WAG40.1 SW

WTG 50